


DIN 7982 H - sim. ISO 7050

Tornillo rosca chapa avellanado

con punta e impronta H (Phillips)

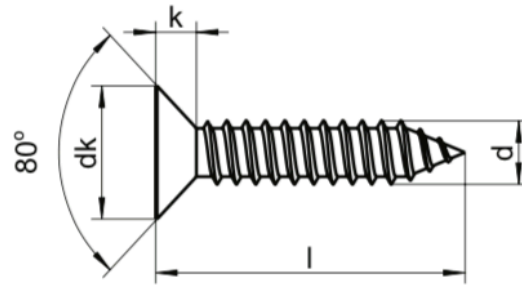

dk	4,3	5,5	6,8	7,5	8,1	9,5	10,8	12,4
k	1,3	1,7	2,1	2,3	2,5	3,0	3,4	3,8
⊕	P1	P1	P2	P2	P2	P2	P3	P3
Long. / Ø	ST2,2	ST2,9	ST3,5	ST3,9	ST4,2	ST4,8	ST5,5	ST6,3
6,5 (1/4")	▲●	▲●	▲●	▲●				
9,5 (3/8")	▲●	▲●	▲●	▲●	▲●	▲●		
13 (1/2")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
16 (5/8")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
19 (3/4")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
22 (7/8")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
25 (1")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
32 (1 1/4")	▲●	▲●	▲●	▲●	▲●	▲●	▲●	▲●
38 (1 1/2")		▲●	▲●	▲●	▲●	▲●	▲●	▲●
45 (1 3/4")			▲●	▲●	▲●	▲●	▲●	▲●
50 (2")			▲●	▲●	▲●	▲●	▲●	▲●
55 (2 1/8")			▲●	▲●	▲●	▲●	▲●	▲●
60 (2 3/8")			▲●	▲●	▲●	▲●	▲●	▲●
70 (2 3/4")			▲●	▲●	▲●	▲●	▲●	▲●
80 (3 3/8")					▲●	▲●	▲●	▲●
90 (3 1/2")					▲●	▲●	▲●	▲●
100 (4")					▲●	▲●	▲●	▲●
120 (4 3/4")						▲●	▲●	▲●
UV	1000	1000	1000 ≥ 32 500	1000 ≥ 32 500	1000 ≥ 32 500 ≥ 50 200	1000 ≥ 22 500 ≥ 32 200	200 ≥ 32 100	200 ≥ 32 100

■ A1 / ▲ A2 / ● A4 | UV: Unidad de venta | Todas las medidas en mm | Otras dimensiones bajo pedido

Ejemplo Art.-Nr.: 7982-2-4,2X38 DIN 7982 - A2 - Ø 4,2mm - l = 38mm - Phillips