


# ISO 14580 - sim. DIN 7984

## Tornillo cilíndrico

con impronta TX y cabeza baja

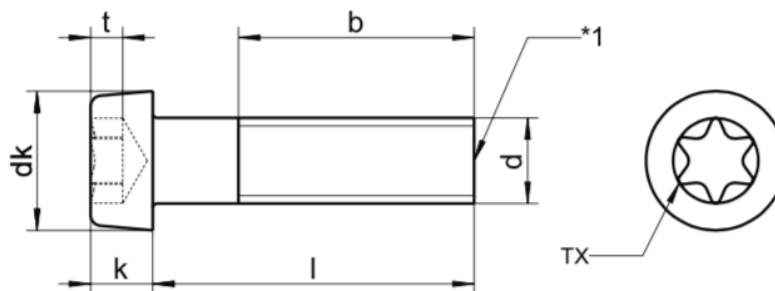

dk	8,5	10,0	13,0
k	3,65	4,40	5,80
t min.	1,52	1,90	2,66
t max.	1,91	2,29	3,05
b	38	38	38
☼	TX 25	TX 30	TX 45
<b>Long. / Ø</b>	<b>M5</b>	<b>M6</b>	<b>M8</b>
8	▲ ●	▲ ●	
10	▲ ●	▲ ●	▲ ●
12	▲ ●	▲ ●	▲ ●
14	▲ ●	▲ ●	▲ ●
16	▲ ●	▲ ●	▲ ●
20	▲ ●	▲ ●	▲ ●
25	▲ ●	▲ ●	▲ ●
30	▲ ●	▲ ●	▲ ●
35	▲ ●	▲ ●	▲ ●
40	▲ ●	▲ ●	▲ ●
45	▲ ●	▲ ●	▲ ●
50	▲ ●	▲ ●	▲ ●
55	▲ ●	▲ ●	▲ ●
60	▲ ●	▲ ●	▲ ●
65	▲ ●	▲ ●	▲ ●
70	▲ ●	▲ ●	▲ ●
75			▲ ●
80			▲ ●
<b>UV</b>	500 ≥ 45 200	500 ≥ 20 200 ≥ 50 100	200 ≥ 25 100

■ A1 / ▲ A2 / ● A4 | UV: Unidad de venta | Todas las medidas en mm | Otras dimensiones bajo pedido

Ejemplo Art.-Nr.: 14580-2-4X16 ISO 14580 - A2 - M4 - l = 16mm - \*1: sin chaflán