


# DIN 935

## Tuerca almenada

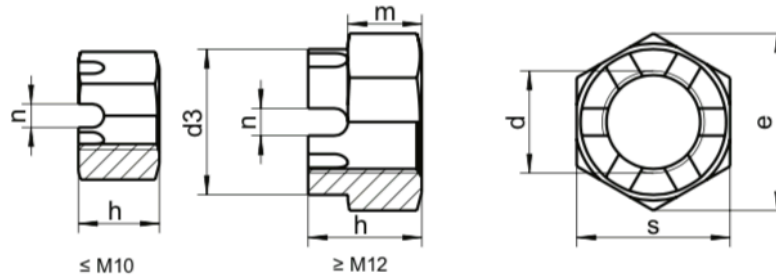

d	m	h	s	e	d3	n	●
M5	4,0	6,0	8	8,87	-	1,4	8
M6	5,0	7,5	10	11,05	-	2,0	10
M8	6,5	9,5	13	14,38	-	2,5	13
M10	8,0	12,0	17	18,90	-	2,8	17
M12	10,0	15,0	19	21,10	17	3,5	19
M14	11,0	16,0	22	24,49	19	3,5	22
M16	13,0	19,0	24	26,75	22	4,5	24
M18	15,0	21,0	27	30,14	25	4,5	27
M20	16,0	22,0	30	33,53	28	4,5	30
M24	19,0	27,0	36	39,98	34	5,5	36
M27	22,0	30,0	41	45,63	38	5,5	41
M30	24,0	33,0	46	51,28	42	7,0	46
M36	29,0	38,0	55	55,80	50	7,0	55

Grado	UV
▲ ●	100
▲ ●	100
▲ ●	100
▲ ●	50
▲ ●	50
▲ ●	50
▲ ●	50
▲ ●	25
▲ ●	25
▲ ●	10
▲ ●	10
▲ ●	10
▲ ●	10

■ A1 / ▲ A2 / ● A4 | UV: Unidad de venta | Todas las medidas en mm | Otras dimensiones bajo pedido  
Ejemplo Art.-Nr.: 935-2-8 DIN 935 - A2 - M8