


DIN 966 H - sim. ISO 7047

Tornillo cabeza gota sebo

con impronta en cruz H (Phillips)

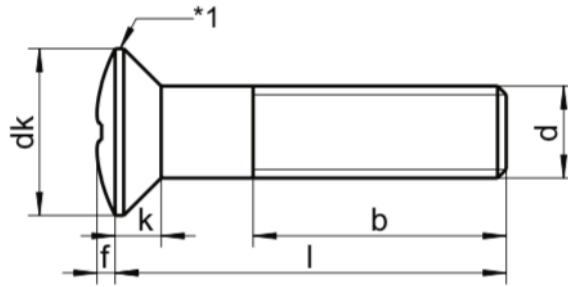

	4,7	5,6	7,5	9,2	11,0	14,5	18,0
dk	4,7	5,6	7,5	9,2	11,0	14,5	18,0
f	0,60	0,75	1,00	1,25	1,50	2,00	2,50
k	1,50	1,65	2,20	2,50	3,00	4,00	5,00
b min.	18	19	22	25	28	34	40
⊕	P 1	P 1	P 2	P 2	P 3	P 4	P 4
Long. / Ø	M2,5	M3	M4	M5	M6	M8	M10
4	▲●	▲●					
5	▲●	▲●	▲●				
6	▲●	▲●	▲●	▲●			
8	▲●	▲●	▲●	▲●	▲●		
10	▲●	▲●	▲●	▲●	▲●	▲●	
12	▲●	▲●	▲●	▲●	▲●	▲●	
14	▲●	▲●	▲●	▲●	▲●	▲●	
16	▲●	▲●	▲●	▲●	▲●	▲●	
18	▲●	▲●	▲●	▲●	▲●	▲●	
20	▲●	▲●	▲●	▲●	▲●	▲●	▲●
22		▲●	▲●	▲●	▲●	▲●	▲●
25		▲●	▲●	▲●	▲●	▲●	▲●
28		▲●	▲●	▲●	▲●	▲●	▲●
30		▲●	▲●	▲●	▲●	▲●	▲●
35		▲●	▲●	▲●	▲●	▲●	▲●
40		▲●	▲●	▲●	▲●	▲●	▲●
45		▲●	▲●	▲●	▲●	▲●	▲●
50		▲●	▲●	▲●	▲●	▲●	▲●
55			▲●	▲●	▲●	▲●	▲●
60			▲●	▲●	▲●	▲●	▲●
65			▲●	▲●	▲●	▲●	
70			▲●	▲●	▲●	▲●	
75				▲●	▲●	▲●	
80				▲●	▲●	▲●	
85				▲●	▲●	▲●	
90				▲●	▲●	▲●	
95				▲●	▲●	▲●	
100				▲●	▲●	▲●	
UV	1000	1000 ≥ 25 500	1000 ≥ 25 500	500 ≥ 25 200	200 ≥ 35 100	100	100

■ A1 / ▲ A2 / ● A4 | UV: Unidad de venta | Todas las medidas en mm | Otras dimensiones bajo pedido
Ejemplo Art.-Nr.: 966-2-8X40 DIN 966 - A2 - M8 - l = 40mm - Phillips - *1: borde redondeado o aplanado