



sim. ISO 7047 - **DIN 966 Z**
Tornillo cabeza gota sebo
 con impronta en cruz Z (Pozidrive)

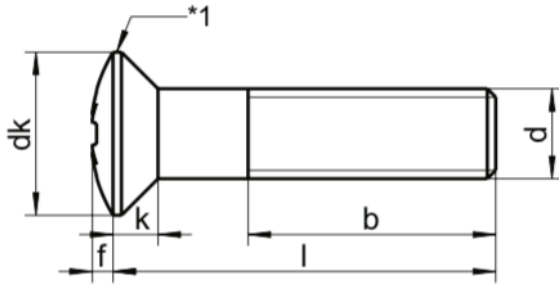

dk	3,8	4,7	5,6	7,5	9,2	11,0
f	0,50	0,60	0,75	1,00	1,25	1,50
k	1,20	1,50	1,65	2,20	2,50	3,00
b min.	16	18	19	22	25	28
⊕	Z 1	Z 1	Z 1	Z 2	Z 2	Z 3
Long. / Ø	M2	M2,5	M3	M4	M5	M6
4	▲●	▲●	▲●			
5	▲●	▲●	▲●	▲●		
6	▲●	▲●	▲●	▲●	▲●	
8	▲●	▲●	▲●	▲●	▲●	▲●
10	▲●	▲●	▲●	▲●	▲●	▲●
12	▲●	▲●	▲●	▲●	▲●	▲●
14		▲●	▲●	▲●	▲●	▲●
16		▲●	▲●	▲●	▲●	▲●
18		▲●	▲●	▲●	▲●	▲●
20		▲●	▲●	▲●	▲●	▲●
25			▲●	▲●	▲●	▲●
28			▲●	▲●	▲●	▲●
30			▲●	▲●	▲●	▲●
35			▲●	▲●	▲●	▲●
40			▲●	▲●	▲●	▲●
45			▲●	▲●	▲●	▲●
50			▲●	▲●	▲●	▲●
55				▲●	▲●	▲●
60				▲●	▲●	▲●
65				▲●	▲●	▲●
70				▲●	▲●	▲●
75					▲●	▲●
80					▲●	▲●
90					▲●	▲●
95					▲●	▲●
100					▲●	▲●
UV	1000	1000	1000 ≥ 25 500	1000 ≥ 25 500	500 ≥ 25 200	200 ≥ 35 100

■ A1 / ▲ A2 / ● A4 | UV: Unidad de venta | Todas las medidas en mm | Otras dimensiones bajo pedido
 Ejemplo Art.-Nr.: 966-2-6X40Z DIN 966 - A2 - M6 - l = 40mm - Pozidrive - *1: borde redondeado o aplanado