



sim. ISO 4035 - **DIN 439**

# Tuerca hexagonal

Forma B, baja, con chaflán

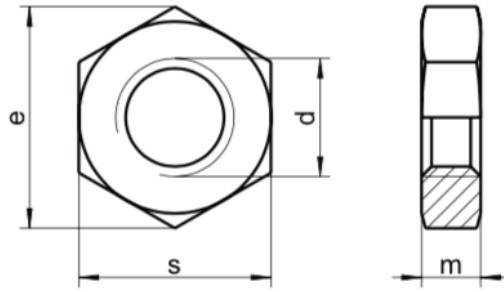

<b>d</b>	<b>m min.</b>	<b>s</b>	<b>e</b>	<b>⬤</b>
M1,6	0,75	3,2	3,48	3,2
M2	0,95	4	4,32	4
M2,3	0,95	4,5	5,20	4,5
M2,5	1,35	5	5,45	5
M2,6	1,35	5	5,80	5
M3	1,55	5,5	6,01	5,5
M4	1,95	7	7,66	7
M5	2,45	8	8,79	8
M6	2,90	10	11,05	10
M8	3,70	13	14,38	13
M10	4,70	17	18,90	17
M12	5,70	19	21,10	19
M14	6,42	22	24,49	22
M16	7,42	24	26,75	24
M18	8,42	27	29,56	27
M20	9,10	30	32,95	30
M22	9,90	32	35,03	32
M24	10,90	36	39,55	36
M27	12,40	41	45,20	41
M30	13,90	46	50,85	46
M33	15,40	50	55,37	50
M36	16,90	55	60,79	55
M39	18,20	60	66,44	60
M42	19,70	65	71,30	65
M45	21,20	70	76,95	70
M48	22,70	75	82,60	75

<b>Grado</b>	<b>UV</b>
▲ ●	1000
▲ ●	1000
▲ ●	1000
▲ ●	1000
▲ ●	1000
▲ ●	1000
▲ ●	1000
▲ ●	1000
▲ ●	1000
▲ ●	1000
▲ ●	1000
▲ ●	1000
▲ ●	200
▲ ●	200
▲ ●	200
▲ ●	100
▲ ●	100
▲ ●	50
▲ ●	50
▲ ●	25
▲ ●	25
▲ ●	25
▲ ●	25
▲ ●	10
▲ ●	10
▲ ●	10
▲ ●	10
▲ ●	10

■ A1 / ▲ A2 / ● A4 | UV: Unidad de venta | Todas las medidas en mm | Otras dimensiones bajo pedido

Ejemplo Art.-Nr.: 439-2-8 DIN 439 - A2 - M8